

latexindent.pl

Version 2.1R

Chris Hughes *

April 18, 2015

Abstract

`latexindent.pl` is a Perl script that indents `.tex` files according to an indentation scheme that the user can modify to suit their taste. Environments, including those with alignment delimiters (such as `tabular`), and commands, including those that can split braces and brackets across lines, are *usually* handled correctly by the script. Options for verbatim-like environments and indentation after headings (such as `\chapter`, `\section`, etc) are also available.

Contents

1	Before we begin	2
1.1	Thanks	2
1.2	License	3
2	Demonstration: before and after	3
3	How to use the script	4
3.1	From the command line	4
3.2	From arara	5
4	default, user, and local settings	6
4.1	defaultSettings.yaml	6
4.1.1	Hierarchy of fields	13
4.2	indentconfig.yaml and .indentconfig.yaml (for user settings)	14
4.3	localSettings.yaml	15
4.4	Settings load order	16
4.5	An important example	16
5	Known limitations	17
	References	17
A	Required Perl modules	17
B	The arara rule	18

*smr01cmh AT users.sourceforge.net

Listings

LISTING 1: filecontents before	3
LISTING 2: filecontents after	3
LISTING 3: tikzset before	4
LISTING 4: tikzset after	4
LISTING 5: pstricks before	4
LISTING 6: pstricks after	4
LISTING 7: arara sample usage	6
LISTING 8: cycleThroughBackUps	7
LISTING 9: lookForAlignDelims	8
LISTING 10: tabular before	8
LISTING 11: tabular after	8
LISTING 12: Mark up for aligning delimiters outside of environments	9
LISTING 13: verbatimEnvironments	9
LISTING 14: noIndentBlock	9
LISTING 15: noIndentBlock demonstration	9
LISTING 16: noAdditionalIndent	10
LISTING 17: indentRules	10
LISTING 18: indentAfterHeadings	11
LISTING 19: indentAfterItems	11
LISTING 20: items before	11
LISTING 21: items after	11
LISTING 22: if-else-fi construct before	12
LISTING 23: if-else-fi construct after	12
LISTING 24: checkunmatched	12
LISTING 25: checkunmatchedELSE	12
LISTING 26: checkunmatchedbracket	12
LISTING 27: Conflicting ideas	13
LISTING 28: More conflicting ideas	13
LISTING 29: indentconfig.yaml (sample)	14
LISTING 30: mysettings.yaml (example)	14
LISTING 31: localSettings.yaml (example)	15
LISTING 32: When to set alwaysLookforSplitBrackets=0	16
LISTING 33: helloworld.pl	17
LISTING 34: The arara rule	18
LISTING 35: The arara rule (modified)	18

1 Before we begin

1.1 Thanks

I first created `latexindent.pl` to help me format chapter files in a big project. After I blogged about it on the TeX stack exchange [1] I received some positive feedback and follow-up feature requests. A big thank you to Harish Kumar who has really helped to drive the script forward and has put it through a number of challenging tests—I look forward to more challenges in the future Harish!

The yaml-based interface of `latexindent.pl` was inspired by the wonderful `arara` tool; any similarities are deliberate, and I hope that it is perceived as the compliment that it is. Thank you to Paulo Cereda and the team for releasing this awesome tool; I initially worried that I was going to have to make a GUI for `latexindent.pl`, but the release of `arara` has meant there is no need. Thank you to Paulo for all of your advice and encouragement.

1.2 License

`latexindent.pl` is free and open source, and it always will be. Before you start using it on any important files, bear in mind that `latexindent.pl` has the option to overwrite your `.tex` files. It will always make at least one backup (you can choose how many it makes, see page 7) but you should still be careful when using it. The script has been tested on many files, but there are some known limitations (see Section 5). You, the user, are responsible for ensuring that you maintain backups of your files before running `latexindent.pl` on them. I think it is important at this stage to restate an important part of the license here:

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

There is certainly no malicious intent in releasing this script, and I do hope that it works as you expect it to—if it does not, please first of all make sure that you have the correct settings, and then feel free to let me know with a complete minimum working example as I would like to improve the code as much as possible.



Before you try the script on anything important (like your thesis), test it out on the sample files that come with it in the `success` directory.

2 Demonstration: before and after

Let's give a demonstration of some before and after code—after all, you probably won't want to try the script if you don't much like the results. You might also like to watch the video demonstration I made on youtube [4]

As you look at Listings 1 to 6, remember that `latexindent.pl` is just following its rules—there is nothing particular about these code snippets. All of the rules can be modified so that each user can personalize their indentation scheme.

In each of the samples given in Listings 1 to 6 the 'before' case is a 'worst case scenario' with no effort to make indentation. The 'after' result would be the same, regardless of the leading white space at the beginning of each line which is stripped by `latexindent.pl` (unless a `verbatim`-like environment or `noIndentBlock` is specified—more on this in Section 4).

LISTING 1: filecontents before

```
\begin{filecontents}{mybib.bib}
@online{strawberryperl,
title="Strawberry Perl",
url="http://strawberryperl.com/"}
@online{cmhblog,
title="A Perl script ..."
url="..."
\end{filecontents}
```

LISTING 2: filecontents after

```
\begin{filecontents}{mybib.bib}
  @online{strawberryperl,
    title="Strawberry Perl",
    url="http://strawberryperl.com/"}
  @online{cmhblog,
    title="A Perl script for ..."
    url="..."
\end{filecontents}
```

LISTING 3: tikzset before

```
\tikzset{
shrink inner sep/.code={
\pgfkeysgetvalue...
\pgfkeysgetvalue...
}
}
```

LISTING 4: tikzset after

```
\tikzset{
  shrink inner sep/.code={
    \pgfkeysgetvalue...
    \pgfkeysgetvalue...
  }
}
```

LISTING 5: pstricks before

```
\def\Picture#1{%
\def\stripH{#1}%
\begin{pspicture}[showgrid...
\psforeach{\row}{%
{{3,2.8,2.7,3,3.1}},% <=== Only this
{2.8,1,1.2,2,3},%
...
}}{%
\expandafter...
}
\end{pspicture}}
```

LISTING 6: pstricks after

```
\def\Picture#1{%
  \def\stripH{#1}%
  \begin{pspicture}[showgrid...
    \psforeach{\row}{%
      {{3,2.8,2.7,3,3.1}},% <===
      {2.8,1,1.2,2,3},%
      ...
    }}{%
      \expandafter...
    }
  \end{pspicture}}
```

3 How to use the script

There are two ways to use `latexindent.pl`: from the command line, and using `arara`. We will discuss how to change the settings and behaviour of the script in Section 4.

`latexindent.pl` ships with `latexindent.exe` for Windows users, so that you can use the script with or without a Perl distribution. If you plan to use `latexindent.pl` (i.e. the original Perl script) then you will need a few standard Perl modules—see appendix A on page 17 for details.

In what follows, we will always refer to `latexindent.pl`, but depending on your operating system and preference, you might substitute `latexindent.exe` or simply `latexindent`.

3.1 From the command line

`latexindent.pl` has a number of different switches/flags/options, which can be combined in any way that you like. `latexindent.pl` produces a `.log` file, `indent.log` every time it is run. There is a base of information that is written to `indent.log`, but other additional information will be written depending on which of the following options are used.

```
latexindent.pl
```

This will output a welcome message to the terminal, including the version number and available options.

```
-h latexindent.pl -h
```

As above this will output a welcome message to the terminal, including the version number and available options.

```
latexindent.pl myfile.tex
```

This will operate on `myfile.tex`, but will simply output to your terminal; `myfile.tex` will not be changed in any way using this command.

`-w latexindent.pl -w myfile.tex`

This *will* overwrite `myfile.tex`, but it will make a copy of `myfile.tex` first. You can control the name of the extension (default is `.bak`), and how many different backups are made—more on this in Section 4; see `backupExtension` and `onlyOneBackUp`.

Note that if `latexindent.pl` can not create the backup, then it will exit without touching your original file; an error message will be given asking you to check the permissions of the backup file.

`-o latexindent.pl -o myfile.tex outputfile.tex`

This will indent `myfile.tex` and output it to `outputfile.tex`, overwriting it (`outputfile.tex`) if it already exists. Note that if `latexindent.pl` is called with both the `-w` and `-o` switches, then `-w` will be ignored and `-o` will take priority (this seems safer than the other way round).

Note that using `-o` is equivalent to using `latexindent.pl myfile.tex > outputfile.tex`

`-s latexindent.pl -s myfile.tex`

Silent mode: no output will be given to the terminal.

`-t latexindent.pl -t myfile.tex`

Tracing mode: verbose output will be given to `indent.log`. This is useful if `latexindent.pl` has made a mistake and you're trying to find out where and why. You might also be interested in learning about `latexindent.pl`'s thought process—if so, this switch is for you.

`-l latexindent.pl -l myfile.tex`

Local settings: you might like to read Section 4 before using this switch. `latexindent.pl` will always load `defaultSettings.yaml` and if it is called with the `-l` switch and it finds `localSettings.yaml` in the same directory as `myfile.tex` then these settings will be added to the indentation scheme. Information will be given in `indent.log` on the success or failure of loading `localSettings.yaml`.

`-d latexindent.pl -d myfile.tex`

Only `defaultSettings.yaml`: you might like to read Section 4 before using this switch. By default, `latexindent.pl` will always search for `indentconfig.yaml` or `.indentconfig.yaml` in your home directory. If you would prefer it not to do so then (instead of deleting or renaming `indentconfig.yaml/.indentconfig.yaml`) you can simply call the script with the `-d` switch; note that this will also tell the script to ignore `localSettings.yaml` even if it has been called with the `-l` switch.

`-c latexindent.pl -c=/path/to/directory/ myfile.tex`

If you wish to have backup files and `indent.log` written to a directory other than the current working directory, then you can send these 'cruff' files to another directory.

3.2 From arara

Using `latexindent.pl` from the command line is fine for some folks, but others may find it easier to use from `arara`. `latexindent.pl` ships with an `arara` rule, `indent.yaml`, which can be copied to the directory of your other `arara` rules; otherwise you can add the directory in which `latexindent.pl` resides to your `araraconfig.yaml` file.

Once you have told arara where to find your indent rule, you can use it any of the ways described in Listing 7 (or combinations thereof). In fact, arara allows yet greater flexibility—you can use yes/no, true/false, or on/off to toggle the various options.

LISTING 7: arara sample usage

```
% arara: indent
% arara: indent: {overwrite: yes}
% arara: indent: {output: myfile.tex}
% arara: indent: {silent: yes}
% arara: indent: {trace: yes}
% arara: indent: {localSettings: yes}
% arara: indent: {onlyDefault: on}
% arara: indent: { cruft: /home/cmhughes/Desktop }
\documentclass{article}
...
```

Hopefully the use of these rules is fairly self-explanatory, but for completeness Table 1 shows the relationship between arara directive arguments and the switches given in Section 3.1.

TABLE 1: arara directive arguments and corresponding switches

arara directive argument	switch
overwrite	-w
output	-o
silent	-s
trace	-t
localSettings	-l
onlyDefault	-d
cruft	-c

The `cruft` directive does not work well when used with directories that contain spaces.

4 default, user, and local settings

`latexindent.pl` loads its settings from `defaultSettings.yaml` (rhymes with camel). The idea is to separate the behaviour of the script from the internal working—this is very similar to the way that we separate content from form when writing our documents in \LaTeX .

4.1 defaultSettings.yaml

If you look in `defaultSettings.yaml` you'll find the switches that govern the behaviour of `latexindent.pl`. If you're not sure where `defaultSettings.yaml` resides on your computer, don't worry as `indent.log` will tell you where to find it. `defaultSettings.yaml` is commented, but here is a description of what each switch is designed to do. The default value is given in each case.

You can certainly feel free to edit `defaultSettings.yaml`, but this is not ideal as it may be overwritten when you update your distribution— all of your hard work tweaking the script would be undone! Don't worry, there's a solution—feel free to peek ahead to Section 4.2 if you like.

```
defaultIndent "\t"
```

This is the default indentation (`\t` means a tab) used in the absence of other details for the command or environment we are working with—see `indentRules` for more details (page 10).

If you're interested in experimenting with `latexindent.pl` then you can *remove* all indentation by setting `defaultIndent: ""`

`backupExtension .bak`

If you call `latexindent.pl` with the `-w` switch (to overwrite `myfile.tex`) then it will create a backup file before doing any indentation: `myfile.bak0`

By default, every time you call `latexindent.pl` after this with the `-w` switch it will create `myfile.bak1`, `myfile.bak2`, etc.

`onlyOneBackUp 0`

If you don't want a backup for every time that you call `latexindent.pl` (so you don't want `myfile.bak1`, `myfile.bak2`, etc) and you simply want `myfile.bak` (or whatever you chose `backupExtension` to be) then change `onlyOneBackUp` to 1.

`maxNumberOfBackUps 0`

Some users may only want a finite number of backup files, say at most 3, in which case, they can change this switch. The smallest value of `maxNumberOfBackUps` is 0 which will *not* prevent backup files being made—in this case, the behaviour will be dictated entirely by `onlyOneBackUp`.

`cycleThroughBackUps 0`

Some users may wish to cycle through backup files, by deleting the oldest backup file and keeping only the most recent; for example, with `maxNumberOfBackUps: 4`, and `cycleThroughBackUps` set to 1 then the copy procedure given in Listing 8 would be obeyed.

LISTING 8: `cycleThroughBackUps`

```
copy myfile.bak1 to myfile.bak0
copy myfile.bak2 to myfile.bak1
copy myfile.bak3 to myfile.bak2
copy myfile.bak4 to myfile.bak3
```

`indentPreamble 0`

The preamble of a document can sometimes contain some trickier code for `latexindent.pl` to work with. By default, `latexindent.pl` won't try to operate on the preamble, but if you'd like it to try then change `indentPreamble` to 1.

`alwaysLookforSplitBraces 1`

This switch tells `latexindent.pl` to look for commands that can split *braces* across lines, such as `parbox`, `tikzset`, etc. In older versions of `latexindent.pl` you had to specify each one in `checkunmatched`—this clearly became tedious, hence the introduction of `alwaysLookforSplitBraces`.

As long as you leave this switch on (set to 1) you don't need to specify which commands can split braces across lines—you can ignore the fields `checkunmatched` and `checkunmatchedELSE` described later on page 12.

alwaysLookforSplitBrackets 1

This switch tells `latexindent.pl` to look for commands that can split *brackets* across lines, such as `psSolid`, `pgfplotstabetypeset`, etc. In older versions of `latexindent.pl` you had to specify each one in `checkunmatchedbracket`—this clearly became tedious, hence the introduction of `alwaysLookforSplitBraces`.

As long as you leave this switch on (set to 1) you don't need to specify which commands can split brackets across lines—you can ignore `checkunmatchedbracket` described later on page 12.

removeTrailingWhitespace 0

By default `latexindent.pl` indents every line (including empty lines) which creates ‘trailing whitespace’ feared by most version control systems. If this option is set to 1, trailing whitespace is removed from all lines, also non-empty ones. In general this should not create any problems, but by precaution this option is turned off by default. Thanks to [vosskuhle](#) for providing this feature.

`lookForAlignDelims` This is the first example of a field in `defaultSettings.yaml` that has more than one line; Listing 9 shows more details.

LISTING 9: `lookForAlignDelims`

```
1 lookForAlignDelims :
2   tabular: 1
3   tabularx: 1
4   longtable: 1
5   array: 1
6   matrix: 1
7   bmatrix: 1
8   pmatrix: 1
9   align: 1
10  align*: 1
11  alignat: 1
12  alignat*: 1
13  aligned: 1
14  cases: 1
15  dcases: 1
16  pmatrix: 1
17  listabla: 1
```

The environments specified in this field will be operated on in a special way by `latexindent.pl`. In particular, it will try and align each column by its alignment tabs. It does have some limitations (discussed further in Section 5), but in many cases it will produce results such as those in Listings 10 and 11.

LISTING 10: `tabular` before

```
\begin{tabular}{cccc}
1& 2 & & & & & & & & & \\
5& & & & & & & & & & \\
\end{tabular}
```

LISTING 11: `tabular` after

```
\begin{tabular}{cccc}
1 & 2 & & & & & & & & & \\
5 & & & & & & & & & & \\
\end{tabular}
```

If you find that `latexindent.pl` does not perform satisfactorily on such environments then you can either remove them from `lookForAlignDelims` altogether, or set the

relevant key to 0, for example `tabular: 0`, or if you just want to ignore *specific* instances of the environment, you could wrap them in something from `noIndentBlock` (see Listing 14).

- If you have blocks of code that you wish to align at the `&` character that are *not* wrapped in, for example, `\begin{tabular}...\end{tabular}`, then you use the mark up illustrated in Listing 12. Note that the `%*` must be next to each other, but that there can be any number of spaces (possibly none) between the `*` and `\begin{tabular}`; note also that you may use any environment name that you have specified in `lookForAlignDelims`.

LISTING 12: Mark up for aligning delimiters outside of environments

```
\matrix{%
%* \begin{tabular}
  1 & 2 & 3 & 4 \\
  5 &   & 6 &   \\
%* \end{tabular}
}
```

`verbatimEnvironments` A field that contains a list of environments that you would like left completely alone—no indentation will be done to environments that you have specified in this field—see Listing 13.

LISTING 13: `verbatimEnvironments`

```
1 verbatimEnvironments:
2   verbatim: 1
3   lstlisting: 1
```

Note that if you put an environment in `verbatimEnvironments` and in other fields such as `lookForAlignDelims` or `noAdditionalIndent` then `latexindent.pl` will *always* prioritize `verbatimEnvironments`.

`noIndentBlock` If you have a block of code that you don't want `latexindent.pl` to touch (even if it is *not* a `verbatim`-like environment) then you can wrap it in an environment from `noIndentBlock`; you can use any name you like for this, provided you populate it as demonstrate in Listing 14.

LISTING 14: `noIndentBlock`

```
1 noIndentBlock:
2   noindent: 1
3   cmhtest: 1
```

Of course, you don't want to have to specify these as null environments in your code, so you use them with a comment symbol, `%`, followed by as many spaces (possibly none) as you like; see Listing 15 for example.

LISTING 15: `noIndentBlock` demonstration

```
% \begin{noindent}
  this code
    won't
  be touched
```

```

by
latexindent.pl!
%\end{noindent}

```

`noAdditionalIndent` If you would prefer some of your environments or commands not to receive any additional indent, then populate `noAdditionalIndent`; see Listing 16. Note that these environments will still receive the *current* level of indentation unless they belong to `verbatimEnvironments`, or `noIndentBlock`.

LISTING 16: `noAdditionalIndent`

```

1 noAdditionalIndent :
2   document: 1
3   myexample: 1
4   mydefinition: 1
5   problem: 1
6   exercises: 1
7   mysolution: 1
8   foreach: 0
9   widepage: 1
10  comment: 1
11  \[: 1
12  \]: 1
13  frame: 0

```

Note in particular from Listing 16 that if you wish content within `\[` and `\]` to receive no additional indentation then you have to specify *both* as 1 (the default is 0). If you do not specify both as the same value you may get some interesting results!

`indentRules` If you would prefer to specify individual rules for certain environments or commands, just populate `indentRules`; see Listing 17

LISTING 17: `indentRules`

```

1 indentRules :
2   myenvironment: "\t\t"
3   anotherenvironment: "\t\t\t\t"
4   \[: "\t"

```

Note that in contrast to `noAdditionalIndent` you do *not* need to specify both `\[` and `\]` in this field.

If you put an environment in both `noAdditionalIndent` and in `indentRules` then `latexindent.pl` will resolve the conflict by ignoring `indentRules` and prioritizing `noAdditionalIndent`. You will get a warning message in `indent.log`; note that you will only get one warning message per command or environment. Further discussion is given in Section 4.1.1.

`indentAfterHeadings` This field enables the user to specify indentation rules that take effect after heading commands such as `\part`, `\chapter`, `\section`, `\subsection*` etc. This field is slightly different from all of the fields that we have considered previously, because each element is itself a field which has two elements: `indent` and `level`.

LISTING 18: indentAfterHeadings

```

1 indentAfterHeadings :
2     part:
3         indent: 0
4         level: 1
5     chapter:
6         indent: 0
7         level: 2
8     section:
9         indent: 0
10        level: 3
11    ...

```

The default settings do *not* place indentation after a heading—you can easily switch them on by changing `indent: 0` to `indent: 1`. The `level` field tells `latexindent.pl` the hierarchy of the heading structure in your document. You might, for example, like to have both `section` and `subsection` set with `level: 3` because you do not want the indentation to go too deep.

You can add any of your own custom heading commands to this field, specifying the level as appropriate. You can also specify your own indentation in `indentRules`—you will find the default `indentRules` contains `chapter: " "` which tells `latexindent.pl` simply to use a space character after `\chapter` headings (once `indent` is set to 1 for `chapter`).

`indentAfterItems` The environments specified in `indentAfterItems` tell `latexindent.pl` to look for `\item` commands; if these switches are set to 1 then indentation will be performed so as indent the code after each item.

LISTING 19: indentAfterItems

```

indentAfterItems :
    itemize: 1
    enumerate: 1

```

A demonstration is given in Listings 20 and 21

LISTING 20: items before

```

\begin{itemize}
\item some text here
some more text here
some more text here
\item another item
\end{itemize}

```

LISTING 21: items after

```

\begin{itemize}
\item some text here
        some more text here
        some more text here
\item another item
\end{itemize}

```

`itemNames` If you have your own `item` commands (perhaps you prefer to use `myitem`, for example) then you can put populate them in `itemNames`. For example, users of the `exam` document class might like to add parts to `indentAfterItems` and part to `itemNames` to their user settings—see Section 4.2 on page 14 for details of how to configure user settings, and Listing 30 on page 14 in particular.

`constructIfElseFi` The commands specified in this field will tell `latexindent.pl` to look for constructs that have the form `\if... \else... \fi`, such as, for example, `\ifnum`; see List-

ings 22 and 23 for a before-and-after demonstration.

LISTING 22: if-else-fi construct
before

```
\ifnum\radius>5
\ifnum\radius<16
\draw[decorate,...
\fi
\fi
```

LISTING 23: if-else-fi construct
after

```
\ifnum\radius>5
  \ifnum\radius<16
    \draw[decorate,...
  \fi
\fi
```



The following fields are marked in red, as they are not necessary unless you wish to micro-manage your indentation scheme. Note that in each case, you should not use the backslash.

checkunmatched Assuming you keep `alwaysLookforSplitBraces` set to 1 (which is the default) then you don't need to worry about `checkunmatched`.

Should you wish to deactivate `alwaysLookforSplitBraces` by setting it to 0, then you can populate `checkunmatched` with commands that can split braces across lines—see Listing 24.

LISTING 24: checkunmatched

```
1 checkunmatched:
2   parbox: 1
3   vbox: 1
```

checkunmatchedELSE Similarly, assuming you keep `alwaysLookforSplitBraces` set to 1 (which is the default) then you don't need to worry about `checkunmatchedELSE`.

As in `checkunmatched`, should you wish to deactivate `alwaysLookforSplitBraces` by setting it to 0, then you can populate `checkunmatchedELSE` with commands that can split braces across lines *and* have an 'else' statement—see Listing 25.

LISTING 25: checkunmatchedELSE

```
1 checkunmatchedELSE:
2   pgfkeysifdefined: 1
3   DTLforeach: 1
4   ifthenelse: 1
```

checkunmatchedbracket Assuming you keep `alwaysLookforSplitBrackets` set to 1 (which is the default) then you don't need to worry about `checkunmatchedbracket`.

Should you wish to deactivate `alwaysLookforSplitBrackets` by setting it to 0, then you can populate `checkunmatchedbracket` with commands that can split *brackets* across lines—see Listing 26.

LISTING 26: checkunmatchedbracket

```
1 checkunmatchedbracket:
2   psSolid: 1
3   pgfplotstablecreatecol: 1
```

```
4 pgfplotstable: save: 1
5 pgfplotstable: typeset: 1
6 mycommand: 1
```

4.1.1 Hierarchy of fields

After reading the previous section, it should sound reasonable that `noAdditionalIndent`, `indentRules`, and `verbatim` all serve mutually exclusive tasks. Naturally, you may well wonder what happens if you choose to ask `latexindent.pl` to prioritize one above the other.

For example, let's say that (after reading Section 4.2) you put the fields in Listing 27 into one of your settings files.

LISTING 27: Conflicting ideas

```
1 indentRules:
2   myenvironment: "\t\t"
3 noAdditionalIndent:
4   myenvironment: 1
```

Clearly these fields conflict: first of all you are telling `latexindent.pl` that `myenvironment` should receive two tabs of indentation, and then you are telling it not to put any indentation in the environment. `latexindent.pl` will always make the decision to prioritize `noAdditionalIndent` above `indentRules` regardless of the order that you load them in your settings file. The first time it encounters `myenvironment` it will put a warning in `indent.log` and delete the offending key from `indentRules` so that any future conflicts will not have to be addressed.

Let's consider another conflicting example in Listing 28

LISTING 28: More conflicting ideas

```
1 lookForAlignDelims:
2   myenvironment: 1
3 verbatimEnvironments:
4   myenvironment: 1
```

This is quite a significant conflict—we are first of all telling `latexindent.pl` to look for alignment delimiters in `myenvironment` and then telling it that actually we would like `myenvironment` to be considered as a `verbatim`-like environment. Regardless of the order that we state Listing 28 the `verbatim` instruction will always win. As in Listing 27 you will only receive a warning in `indent.log` the first time `latexindent.pl` encounters `myenvironment` as the offending key is deleted from `lookForAlignDelims`.

To summarize, `latexindent.pl` will prioritize the various fields in the following order:

1. `verbatimEnvironments`
2. `noAdditionalIndent`
3. `indentRules`

4.2 indentconfig.yaml and .indentconfig.yaml (for user settings)

Editing defaultSettings.yaml is not ideal as it may be overwritten when updating your distribution—a better way to customize the settings to your liking is to set up your own settings file, mysettings.yaml (or any name you like, provided it ends with .yaml). The only thing you have to do is tell latexindent.pl where to find it.

latexindent.pl will always check your home directory for indentconfig.yaml and .indentconfig.yaml (unless it is called with the -d switch), which is a plain text file you can create that contains the *absolute* paths for any settings files that you wish latexindent.pl to load. There is no difference between indentconfig.yaml and .indentconfig.yaml, other than the fact that .indentconfig.yaml is a ‘hidden’ file; thank you to [Jacobo Diaz](#) for providing this feature. In what follows, we will use indentconfig.yaml, but it is understood that this equally represents .indentconfig.yaml as well. If you have both files in existence, indentconfig.yaml takes priority.

For Mac and Linux users, their home directory is ~/username while Windows (Vista onwards) is C:\Users\username ¹ Listing 29 shows a sample indentconfig.yaml file.

LISTING 29: indentconfig.yaml (sample)

```
1 # Paths to user settings for latexindent.pl
2 #
3 # Note that the settings will be read in the order you
4 # specify here- each successive settings file will overwrite
5 # the variables that you specify
6
7 paths:
8 - /home/cmhughes/Documents/yamlfiles/mysettings.yaml
9 - /home/cmhughes/folder/othersettings.yaml
10 - /some/other/folder/anameyouwant.yaml
11 - C:\Users\chughes\Documents\mysettings.yaml
12 - C:\Users\chughes\Desktop\test spaces\more spaces.yaml
```

Note that the .yaml files you specify in indentconfig.yaml will be loaded in the order that you write them in. Each file doesn’t have to have every switch from defaultSettings.yaml; in fact, I recommend that you only keep the switches that you want to *change* in these settings files.

To get started with your own settings file, you might like to save a copy of defaultSettings.yaml in another directory and call it, for example, mysettings.yaml. Once you have added the path to indentconfig.yaml feel free to start changing the switches and adding more environments to it as you see fit—have a look at Listing 30 for an example that uses four tabs for the default indent, adds the tabbing environment to the list of environments that contains alignment delimiters, and adds the changes we described on page 11.

LISTING 30: mysettings.yaml (example)

```
1 # Default value of indentation
2 defaultIndent: "\t\t\t\t"
3
4 # environments that have tab delimiters, add more
5 # as needed
```

¹If you’re not sure where to put indentconfig.yaml, don’t worry latexindent.pl will tell you in the log file exactly where to put it assuming it doesn’t exist already.

```

6 lookForAlignDelims:
7   tabbing: 1
8
9 # If you use the exam documentclass, you might
10 # like the following settings
11 # environments that have \item commands
12 indentAfterItems:
13   parts: 1
14
15 # commands to be treated like \item
16 itemNames:
17   part: 1

```

You can make sure that your settings are loaded by checking `indent.log` for details—if you have specified a path that `latexindent.pl` doesn't recognize then you'll get a warning, otherwise you'll get confirmation that `latexindent.pl` has read your settings file ².



When editing `.yaml` files it is *extremely* important to remember how sensitive they are to spaces. I highly recommend copying and pasting from `defaultSettings.yaml` when you create your first whatevernameyoulike.yaml file.

If `latexindent.pl` can not read your `.yaml` file it will tell you so in `indent.log`.

4.3 localSettings.yaml

You may remember on page 5 we discussed the `-l` switch that tells `latexindent.pl` to look for `localSettings.yaml` in the *same directory* as `myfile.tex`. This settings file will be read *after* `defaultSettings.yaml` and, assuming they exist, user settings.

In contrast to the *user* settings which can be named anything you like (provided that they are detailed in `indentconfig.yaml`), the *local* settings file must be called `localSettings.yaml`. It can contain any switches that you'd like to change—a sample is shown in Listing 31.

LISTING 31: `localSettings.yaml` (example)

```

1 # Default value of indentation
2 defaultIndent: " "
3
4 # environments that have tab delimiters, add more
5 # as needed
6 lookForAlignDelims:
7   tabbing: 0
8
9 # verbatim environments- environments specified
10 # in this hash table will not be changed at all!
11 verbatimEnvironments:
12   cmhenvironment: 0

```

You can make sure that your local settings are loaded by checking `indent.log` for details—if `localSettings.yaml` can not be read then you will get a warning, otherwise you'll get confirmation that `latexindent.pl` has read `localSettings.yaml`.

²Windows users may find that they have to end `.yaml` files with a blank line

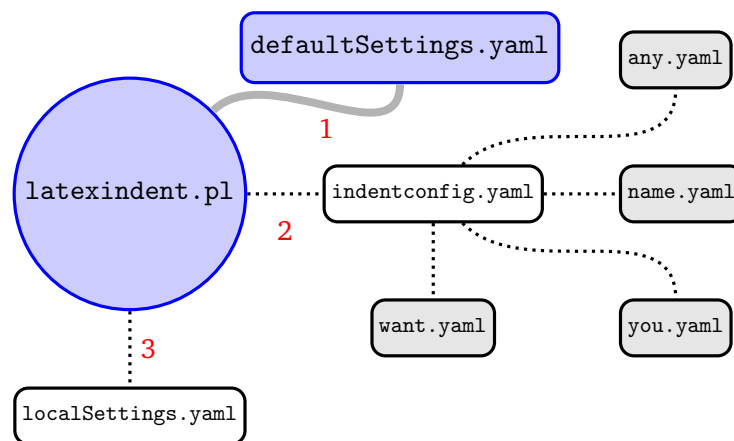


FIGURE 1: Schematic of the load order described in Section 4.4; solid lines represent mandatory files, dotted lines represent optional files. `indentconfig.yaml` can contain as many files as you like—the files will be loaded in order; if you specify settings for the same field in more than one file, the most recent takes priority.

4.4 Settings load order

`latexindent.pl` loads the settings files in the following order:

1. `defaultSettings.yaml` (always loaded, can not be renamed)
2. `anyUserSettings.yaml` (and any other arbitrarily-named files specified in `indentconfig.yaml`)
3. `localSettings.yaml` (if found in same directory as `myfile.tex` and called with `-l` switch; can not be renamed)

A visual representation of this is given in Figure 1.

4.5 An important example

I was working on a document that had the text shown in Listing 32.

LISTING 32: When to set `alwaysLookforSplitBrackets=0`

```
Hence determine how many zeros the function  $h(x)=f(x)-g(x)$ 
has on the interval  $[0,9)$ .
\begin{shortsolution}
  The function  $h$  has  $10$  zeros on the interval  $[0,9)$ .
\end{shortsolution}
```

I had allowed `alwaysLookforSplitBrackets=1`, which is the default setting. Unfortunately, this caused undesired results, as `latexindent.pl` thought that the opening `[` in the interval notation (lines 2 and 4) was an opening brace that needed to be closed (with a corresponding `]`). Clearly this was inappropriate, but also expected since `latexindent.pl` was simply following its matching rules.

In this particular instance, I set up `localSettings.yaml` to contain `alwaysLookforSplitBrackets: 0` and then specified the commands that could split brackets across lines (such as `begin{axis}`) individually in `checkunmatchedbracket`. Another option would have been to wrap the line in an environment from `noIndentBlock` which treats its contents as a verbatim environment.

5 Known limitations

There are a number of known limitations of the script, and almost certainly quite a few that are *unknown*!

The main limitation is to do with the alignment routine of environments that contain delimiters—in other words, environments that are entered in `lookForAlignDelims`. Indeed, this is the only part of the script that can *potentially* remove lines from `myfile.tex`. Note that `indent.log` will always finish with a comparison of line counts before and after.

The routine works well for ‘standard’ blocks of code that have the same number of `&` per line, but it will not do anything for lines that do not—such examples include `tabular` environments that use `\multicolumn` or perhaps spread cell contents across multiple lines. For each alignment block (`tabular`, `align`, etc) `latexindent.pl` first of all makes a record of the maximum number of `&`; if each row does not have that number of `&` then it will not try to format that row. Details will be given in `indent.log` assuming that trace mode is active.

If you have a `verbatim`-like environment inside a `tabular`-like environment, the `verbatim` environment *will* be formatted, which is probably not what you want. I hope to address this in future versions, but for the moment wrap it in a `noIndentBlock` (see page 9).

You can run `latexindent` on `.sty` and `.cls` files, but it may struggle with some of the pattern matching; if you find such a case in which it struggles, please feel free to report it at <https://github.com/cmhughes/latexindent.pl>, and in the meantime, use a `noIndentBlock` (see page 9).

I hope that this script is useful to some—if you find an example where the script does not behave as you think it should, feel free to e-mail me or else come and find me on the <http://tex.stackexchange.com> site; I’m often around and in the chat room.

References

- [1] *A Perl script for indenting tex files*. URL: <http://tex.blogoverflow.com/2012/08/a-perl-script-for-indenting-tex-files/>.
- [2] *CPAN: Comprehensive Perl Archive Network*. URL: <http://www.cpan.org/>.
- [3] *Strawberry Perl*. URL: <http://strawberryperl.com/>.
- [4] *Video demonstration of latexindent.pl on youtube*. URL: http://www.youtube.com/watch?v=s_AMmNVg5WM.

A Required Perl modules

If you intend to use `latexindent.pl` and *not* one of the supplied standalone executable files, then you will need a few standard Perl modules—if you can run the minimum code in Listing 33 (`perl helloworld.pl`) then you will be able to run `latexindent.pl`, otherwise you may need to install the missing modules.

LISTING 33: `helloworld.pl`

```
#!/usr/bin/perl

use strict;
use warnings;
use FindBin;
use YAML::Tiny;
use File::Copy;
```

```

use File::Basename;
use Getopt::Long;
use File::HomeDir;

print "hello␣world";
exit;

```

My default installation on Ubuntu 12.04 did *not* come with all of these modules as standard, but Strawberry Perl for Windows [3] did.

Installing the modules given in Listing 33 will vary depending on your operating system and Perl distribution. For example, Ubuntu users might visit the software center, or else run

```
sudo perl -MCPAN -e 'install "File::HomeDir"'
```

Strawberry Perl users on Windows might use CPAN client. All of the modules are readily available on CPAN [2].

As of Version 2.1R, `indent.log` will contain details of the location of the Perl modules on your system. `latexindent.exe` is a standalone executable for Windows (and therefore does not require a Perl distribution) and caches copies of the Perl modules onto your system; if you wish to see where they are cached, use the trace option, e.g. `latexindent.exe -t myfile.tex`.

B The arara rule

The arara rule (`indent.yaml`) contains lines such as those given in Listing 34. With this setup, the user *always* has to specify whether or not they want (in this example) to use the trace identifier.

LISTING 34: The arara rule

```

...
arguments:
- identifier: trace
  flag: <arara> @{ isTrue( parameters.trace, "-t" ) }
...

```

If you would like to have the trace option on by default every time you call `latexindent.pl` from arara (without having to write `% arara: indent: {trace: yes}`), then simply amend Listing 34 so that it looks like Listing 35.

LISTING 35: The arara rule (modified)

```

...
arguments:
- identifier: trace
  flag: <arara> @{ isTrue( parameters.trace, "-t" ) }
  default: "-t"
...

```

With this modification in place, you now simply to write `% arara: indent` and trace mode will be activated by default. If you wish to turn off trace mode then you can write `% arara: indent: {trace: off}`.

Of course, you can apply these types of modifications to *any* of the identifiers, but proceed with caution if you intend to do this for *overwrite*.